


## SX7CB

## HCMOS SURFACE MOUNT CRYSTAL CLOCK OSCILLATOR

### FEATURES

- SMD package
- Low voltage
- Low current
- Applications : PC main boards, Portable electronics, Wireless LAN....

7.0 x 5.0 x 1.5 mm

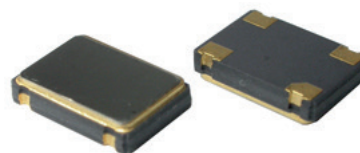

Item	Specification		
Frequency Range	312 kHz ~ 60.0 MHz		
Output Logic	CMOS		
Overall Frequency Stability*	±20 ppm ~ ±100 ppm (see options)		
Operating Temperature Range	0 ~ +70°C commercial application (see options) -40 ~ +85°C industrial application (see options)		
Supply Voltage Vdd	+1.0V ±5%	+1.2V ±5%	+1.5V ±5%
Supply Current Idd	2 mA ~ 4 mA	4 mA ~ 10 mA	4 mA ~ 12 mA
Output Level	VOH ≥ 0.9 Vdd		VOL ≤ 0.1 Vdd
Output Load	15 pF		
Symmetry	45/55%		
Rise Time / Fall Time Fr/Ff	2 ~ 8 ns		
Tri-state function	pin #1 = high or open pin #1 = low		pin #3 ==> oscillation pin #3 ==> high impedance
Start-up Time	10 ms max.		
RMS Jitter (12 kHz to 20 MHz band)	1 ps max.		
Packing Unit	1000 pcs/reel		
Soldering Condition	260°C, 10 sec x 2max		
	Customer specifications on request		


(\*) Includes initial tolerance @+25°C, stability over operating temperature, stability vs. load change, stability vs. supply change and one year aging

## OPTIONS & ORDERING INFORMATION

SX7CB	.....	.....	.....	.....	..... MHz
Supply Voltage	Operating Temp. *	Overall Stability *	Tri-state Function	Output Load *	Frequency in MHz
10 = +1.0V	E = 0°/+70°C	20 = ±20 ppm	E = Tri-state	Blanc = 15pF	Please specify the frequency in MHz
12 = +1.2V	F = -20°/+70°C	25 = ±25 ppm			
15 = +1.5V	K = -40°/+85°C	30 = ±30 ppm			
		50 = ±50 ppm			
		100 = ±100 ppm			

\* Note : Not all combinations are possible, please consult us.

## OUTLINE DIMENSIONS

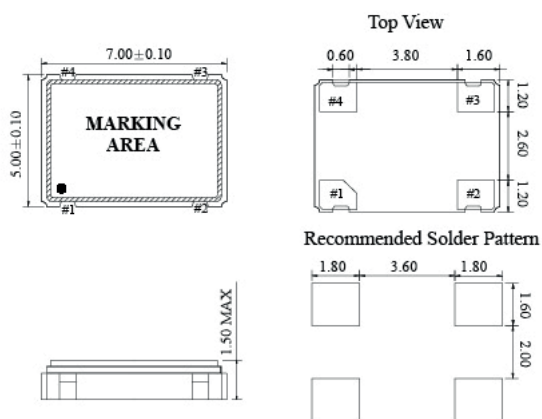

### Pin Connections

#1 : E/D

#2 : GND

#3: Output

#4 : Vdd