


OPTIONS & ORDERING INFORMATION

MXIC					MHz
	Supply Voltage *	Operating Temp. *	Overall Stability *	Tri-state Function	Output Load *
	18 = +1.8V	F = -20° / +70°C	20 = ±20 ppm	E = Tri-state Enable	blanc = 15 pF
	25 = +2.5V	K = -40° / +85°C	25 = ±25 ppm	B = Tri-state Power Down	H = >15 pF , consult us
	28 = +2.8V		30 = ±30 ppm	F = None	
	30 = +3.0V		50 = ±50 ppm		
	33 = +3.3V		100 = ±100 ppm		
	1V3 = +1.8V to +3.3V				Please specify the frequency in MHz
	2V3 = +2.5V to +3.3V				


* Note : Not all combinations are possible , please consult us.

OUTLINE DIMENSIONS (MM)

Package Size – Dimensions (Unit: mm)

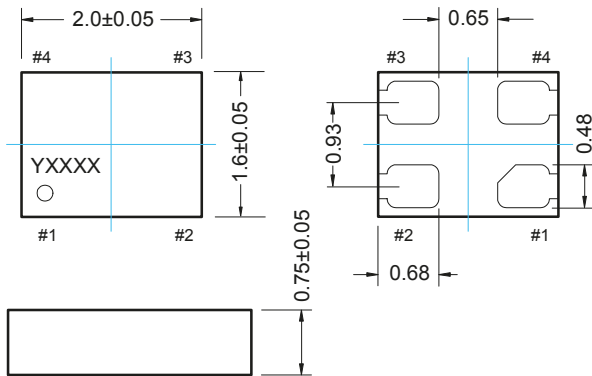

Recommended Land Pattern (Unit: mm)

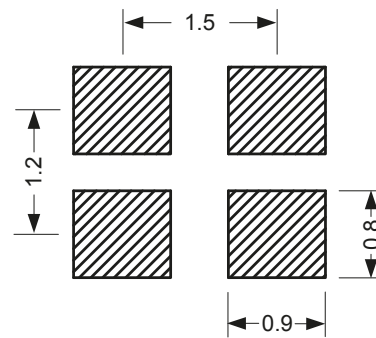

Pin Connections

#1 : E/D or NC

#2 : GND

#3: Output

#4 :Vdd