


SX2CVT

HCMOS SURFACE MOUNT VCTCXO

2.5 x 2.0 x 0.9 mm

FEATURES

- Ultra-miniature package
- High shock and vibrational resistivity
- Low current consumption
- Applications: Portable electronics, GPS, ...

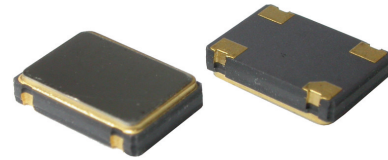

Item	Specification						
Frequency Range	8.192 MHz ~ 40.0 MHz						
Output Signal	CMOS						
Supply Voltage Vdd (see options)	+1.8V ±5%	+2.5V ±5%	+2.8V ±5%	+3.0V ±5%	+3.3V ±5%		
Supply Current Idd	6 mA max						
Frequency Tolerance	±1.0 ppm at 25°C ±2°C						
Frequency Stability vs Temperature (see options)		±0.5 ppm	±1.0 ppm	±1.5 ppm	±2.0 ppm	±2.5 ppm	±3.0 ppm
	0° to +50°C	○	○	○	○	○	○
	-10° to +60°C	○	○	○	○	○	○
	-20° to +70°C	X	○	○	○	○	○
	-30° to +75°C	X	○	○	○	○	○
-40° to +85°C	X	◇	○	○	○	○	
	○ = available		◇ = please contact us		X = not available		
Frequency Stability vs Aging	±1.0 ppm max. per year at 25°C						
Frequency Stability vs Voltage Change	±0.3 ppm max. , for a ±5% input voltage change						
Frequency Stability vs Load Change	±0.3 ppm max. , for a ±10% load condition change						
Output Level	VOH ≥ 0.9Vdd			VOL ≤ 0.1Vdd			
Output Load	15 pF						
Symmetry	45 / 55 %						
Rise / Fall time Fr/Ff	5 ns max.						
Start-up Time	5 ms typ. , 10 ms max.						
RMS Jitter (12 kHz to 20 MHz band)	1 ps max.						
Phase noise	-145 dBc/Hz typ. at 10 kHz offset						
Voltage Control Function	Control voltage range			Center voltage +1.5V ±1.0V for all input voltages			
	Frequency pulling range			±5 ppm min.			
	Linearity			10 % max			
	Slope polarity			Positive			
Packing Unit	3000pcs / reel						
Soldering Condition	260°C , 10 sec x2 max						

Customer specifications on request


OPTIONS & ORDERING INFORMATION

SX2CVT						MHz
Supply Voltage *	Operating Temp. *	Temperature Stability *	Tri-state Function	Package type	Pulling **	Frequency in MHz
18 = +1.8V	C = 0° / +50°C	0.5 = ±0.5 ppm	F = No Tri-state	4P = 4-pad version	05 = ±5 ppm min.	Please specify the frequency in MHz
25 = +2.5V	D = -10° / +60°C	1.0 = ±1.0 ppm				
28 = +2.8V	F = -20° / +70°C	1.5 = ±1.5 ppm				
30 = +3.0V	G = -30° / +75°C	2.0 = ±2.0 ppm				
33 = +3.3V	H = -30° / +85°C	2.5 = ±2.5 ppm				
	K = -40° / +85°C	3.0 = ±3.0 ppm				

* Note : Not all combinations are possible , please consult us.

** Other pulling range is available on customer specification

OUTLINE DIMENSIONS (MM)

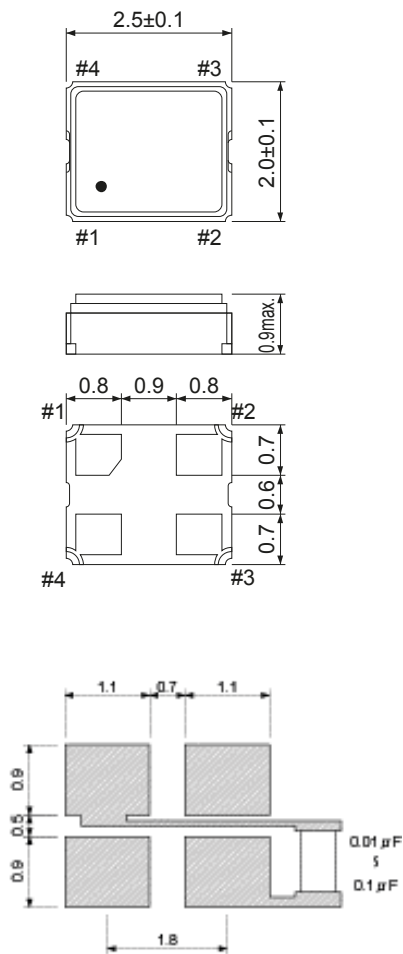

Pin Connections

#1 : Control Voltage

#2 : GND

#3 : Output

#4 :Vdd