

# SX7K

# 32.768 kHz SURFACE MOUNT CLOCK OSCILLATOR

## FEATURES

- Miniature package
- Low current consumption
- Extend temperature range available
- Applications: Wireless LAN, Bluetooth and mobile communication,...

7.0 x 5.0 x 1.5 mm



Item	Specification			
Frequency Range	32.768 kHz			
Output Logic	CMOS			
Overall Frequency Stability *	± 20 ppm ~ ± 100 ppm (see options)			
Operating Temperature Range	0 ~ +70°C commercial application (see options) -40 ~ +85°C industrial application (see options)			
Supply Voltage Vdd	+1.8V ±5%	+2.5V ±5%	+3.3V ±5%	+5.0V ±5%
Supply Current Idd	1.0 mA max		1.0 mA max	
Output Level	VOH ≥ 0.9 Vdd		VOL ≤ 0.1 Vdd	
Output Load	15 pF			
Symmetry	45 / 55 %			
Rise Time / Fall Time Fr/Ff	6 ns max			
Tri-state function	pin #1 = high or open pin #1 = low		pin #3 ==> oscillation pin #3 ==> high impedance	
Start-up Time	10 ms max.			
Packing Unit	1000pcs / reel			
Soldering Condition	260 °C , 10 sec x2 max			
<b>Customer specifications on request</b>				


(\*) Includes initial tolerance @+25°C, stability over operating temperature, stability vs. load change, stability vs. supply change and one year aging

## OPTIONS & ORDERING INFORMATION

SX7K	Supply Voltage	Operating Temp. *	Overall Stability *	Tri-state Function	Output Load *	32.768 kHz Frequency in kHz
	18 = +1.8V	D = -10° / +60°C	20 = ±20 ppm	E = Tri-state	Blanc = 15 pF	
	25 = +2.5V	E = 0° / +70°C	25 = ±25 ppm			
	33 = +3.3V	F = -20° / +70°C	30 = ±30 ppm			
	50 = +5.0V	G = -30° / +75°C	50 = ±50 ppm			
		H = -30° / +85°C	100 = ±100 ppm			
		K = -40° / +85°C				

(\*) Note : Not all combinations are possible, please consult us.

## OUTLINE DIMENSIONS

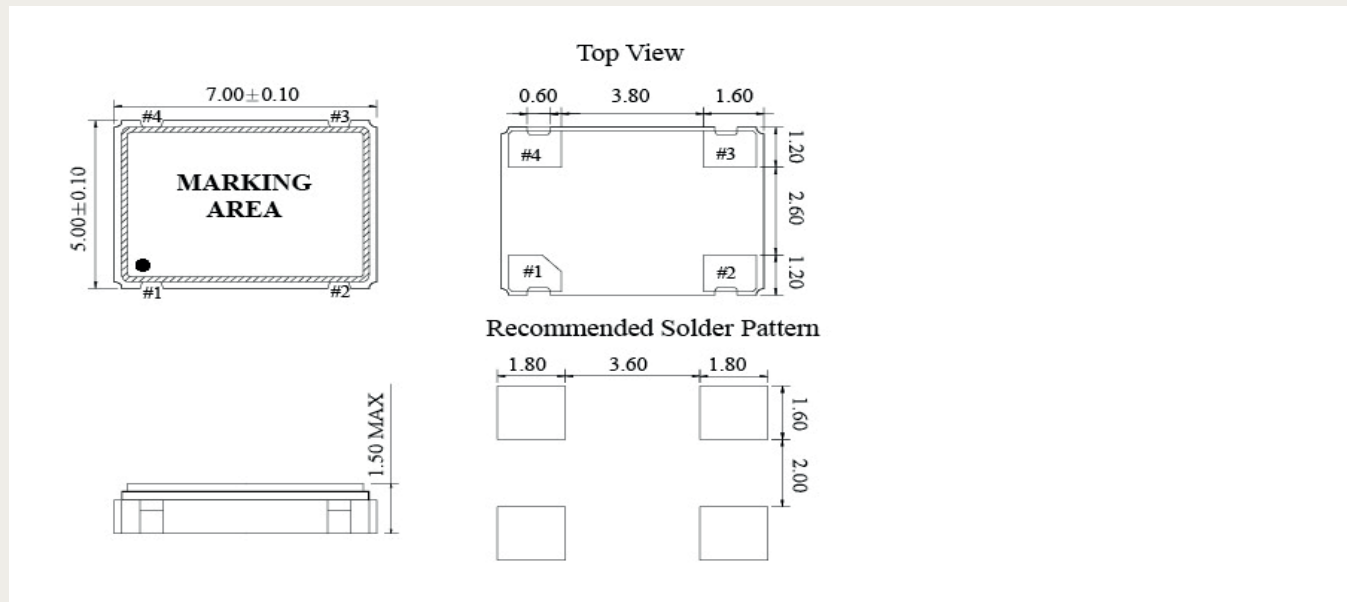

Pin Connections	#1 : E/D	#2 : GND	#3: Output	#4 : Vdd
-----------------	----------	----------	------------	----------